


PLAN DRAWING - OVERVIEW M1:100

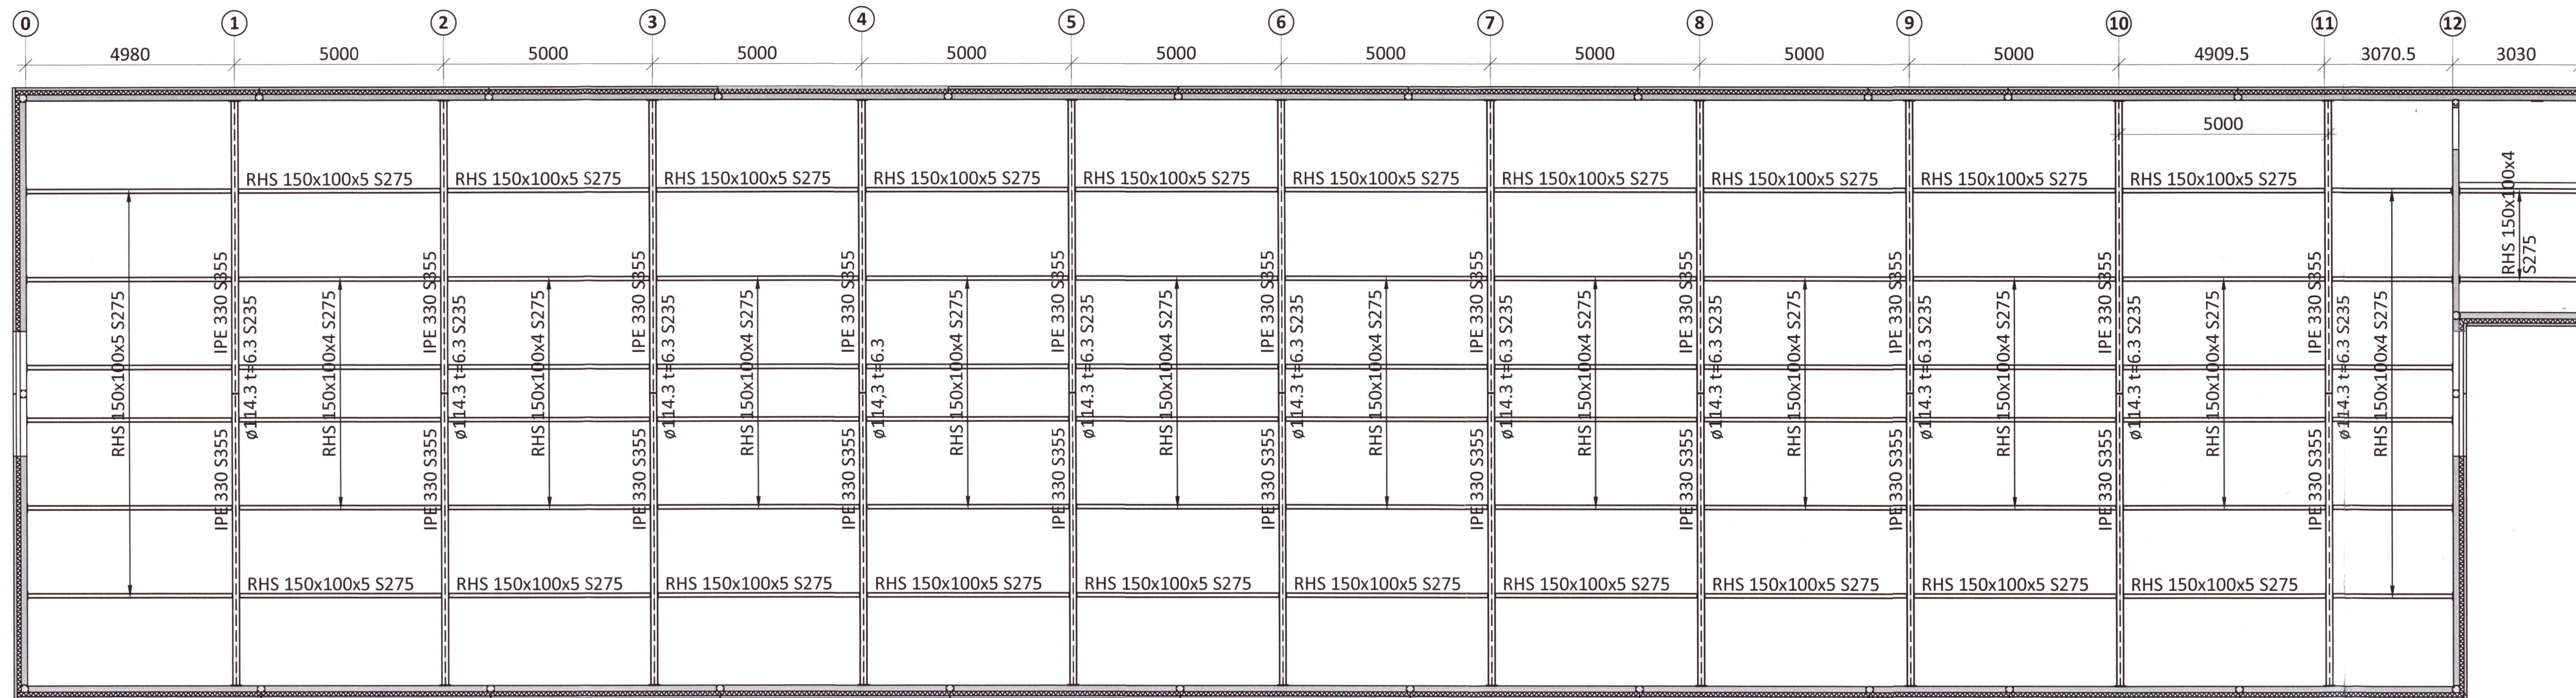

ÁRITUN BYGGINGARFULLTRÚA


Umhverfis- og tæknisvið Uppsveita
Yfirfarið
 09 MAR 2021
Silja S.
 Fl. Byggingarfulltrúi

VIGRIS HALD
 Kt. 100760-5849

ÁRITUN HÖNNUNARSTJÓRA: KT.
 SÉRUPPDRÁTTUR ER Í SAMRÆMI VÍÐ ADALUPPDRÆTTI.
 VERKNR: DAGS.ÚTG:

- NOTES:
- ALL DIMENSIONS ARE IN mm
 - ADDITIONAL LOAD FROM INSTALLATIONS IS MAX 0,2 KN/m²
 - PROPERTIES OF STEEL IS S355 I2 UNLESS OTHERWISE DEFINED
 - STEEL QUALITY ASSUMES THAT MINIMUM TEMPERATURE IN BUILDING IS +10°C
 - THE CONSTRUCTION OF THE ELECTRIC WELDING WILL BE IN ACCORDANCE WITH THE STANDARD EN 1011. WELDING PROCESSES SHALL BE PRODUCED BY ELECTRIC WELDERS WHO HAVE THE SPECIFIC RIGHTS ACCORDING TO IST EN 287-1.
 - BOLTS, WASHERS AND TUBES: HOT GALVANIZED 8.8. ACCT. EN 898-1 AND EN 898-2
 - ALL STEEL WORKS SHALL BE HOT GALVANIZED ACCT. CONTRACT

PLAN DRAWING - DETAIL M1:50

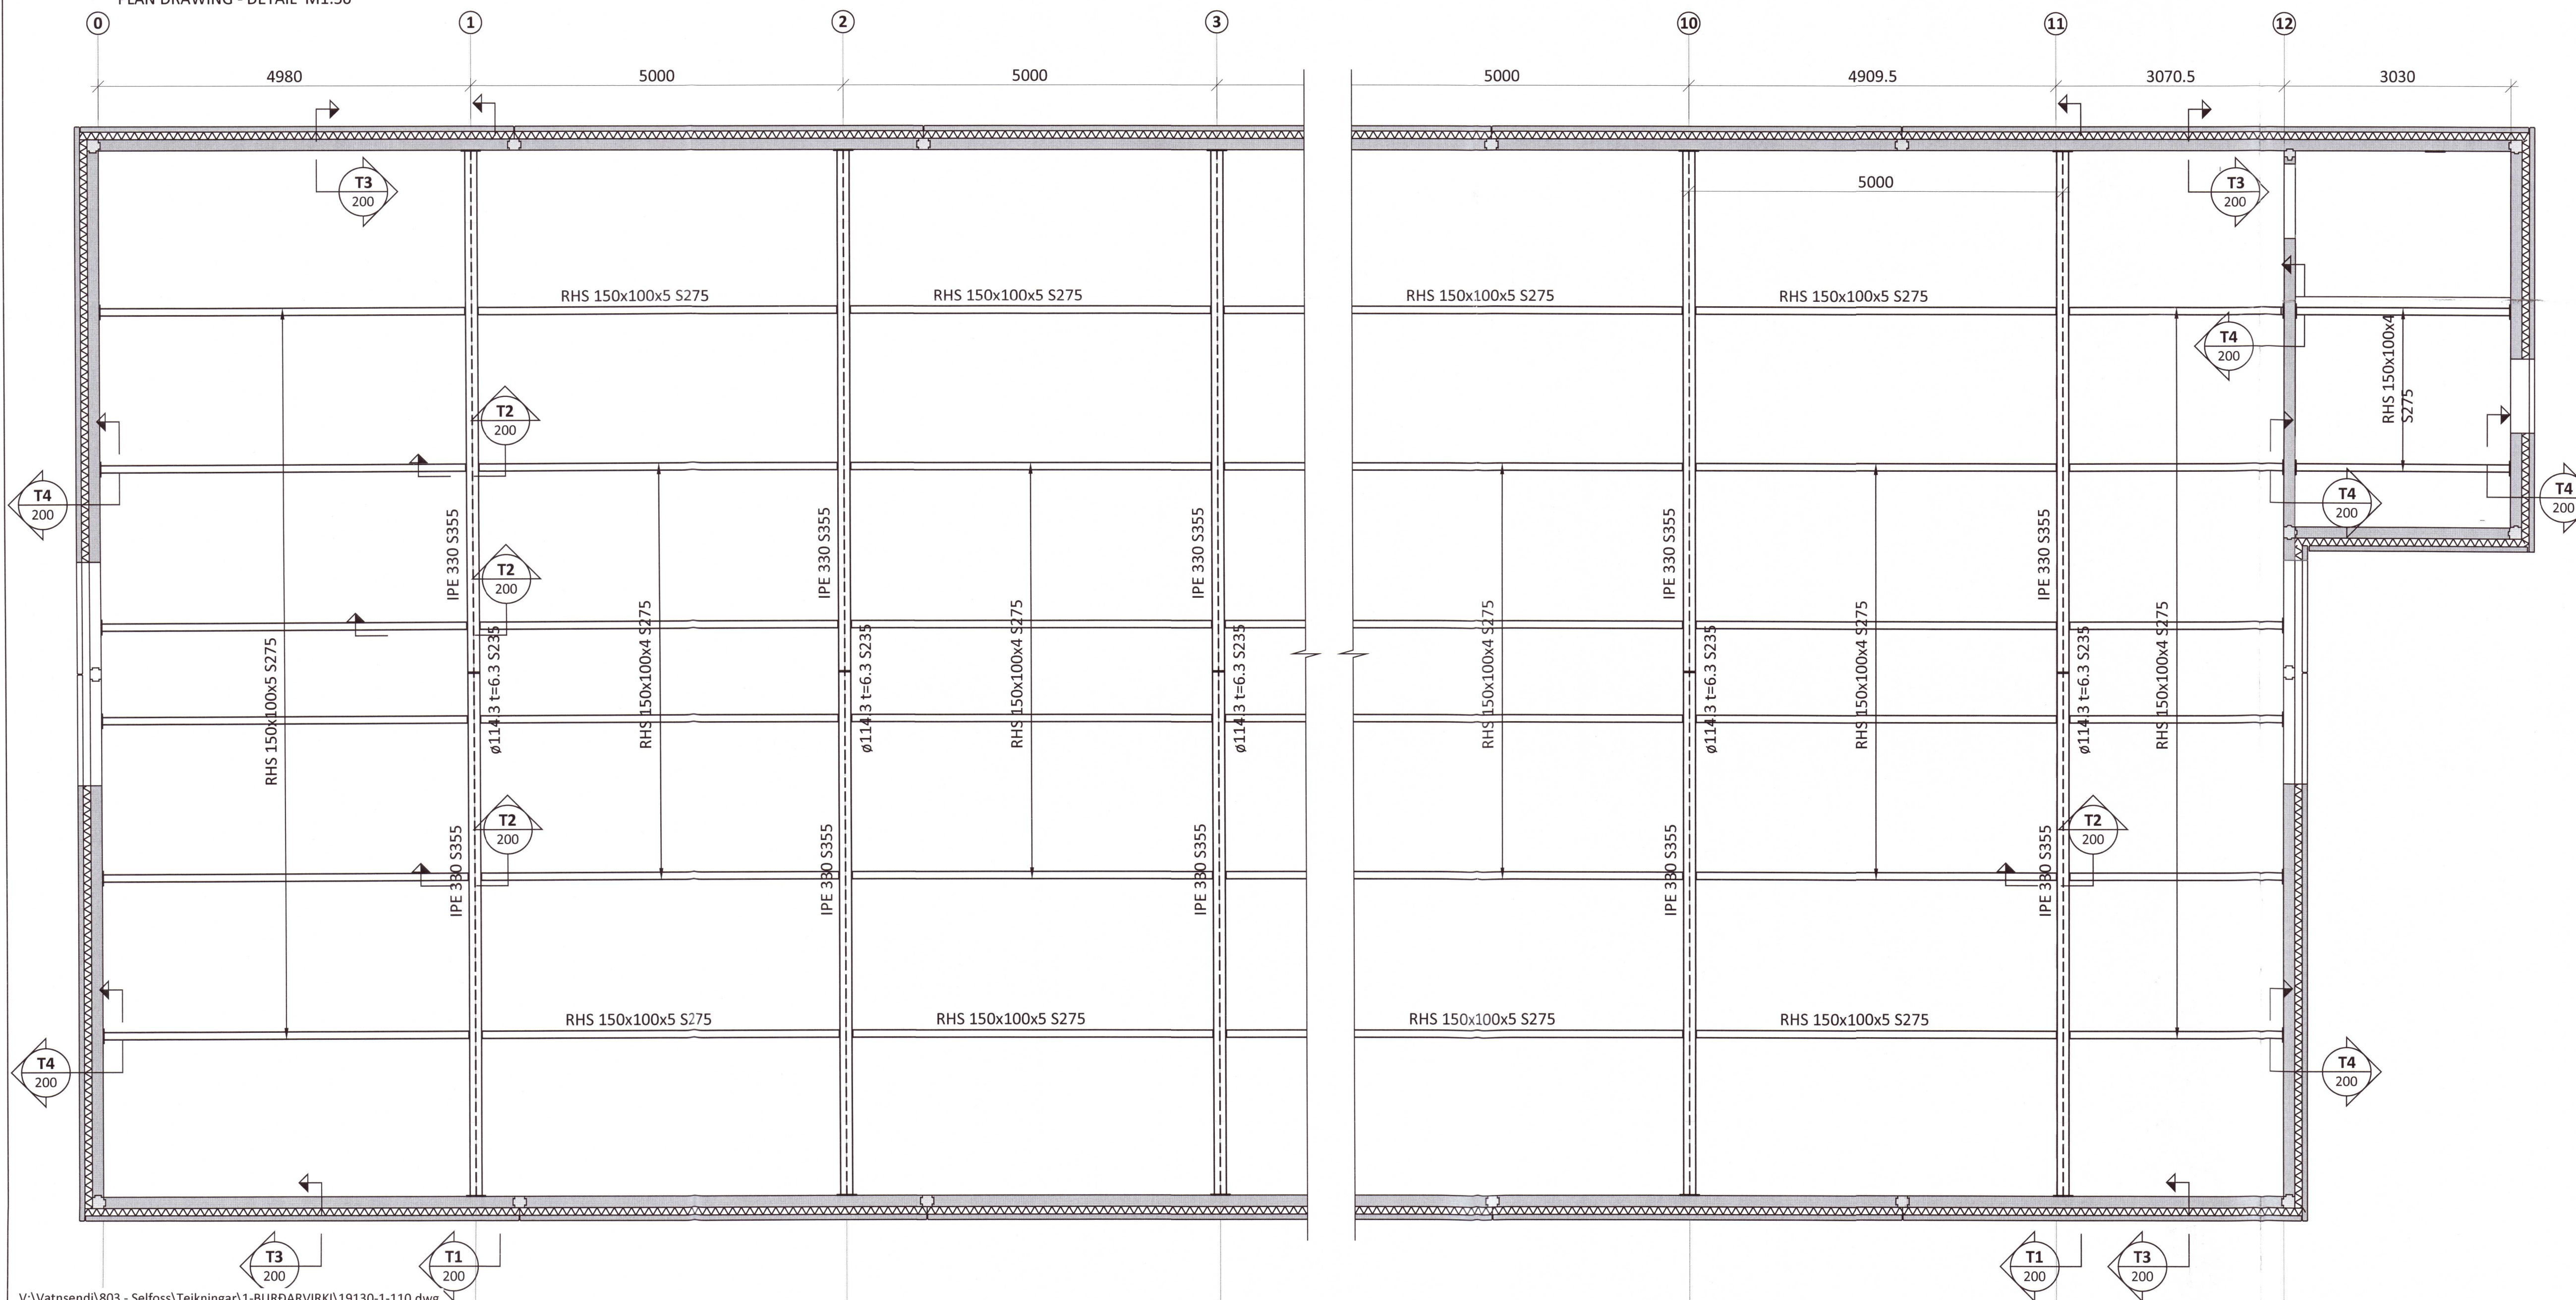

ferill
 VERKFRÆÐISTOFA

VATNSENDI
 ELDISHÚS - MATSHLUTAR 15 OG 16 803 SELFOSS
 BURÐARVIRKI
 ÞAKVIRKI
 YFIRLITSMYND OG GRUNNMÝND
 20210477
 SAMPYKKT: *prettur* KT. 260172-3879
 HÖNNUÐUR: YFIRFARIÐ DAGS. ÚTG. DAGS. BREYTT.
 SB sb@ferill.is ÞÓ 17.02.21
 MKV. (A1) VERKNR. TEIKN. NR. BREYTT.
 1:100/1:50 19130 1-110
 Ferill ehf. Mörkin 1 108 Reykjavík Sími: 575 1600 www.ferill.is